
AFSLOCK PFA HOUSING


AfsLock PFA Cartridge Housing offers excellent space-saving solution. This housing locks the cartridge into the bowl, allowing the bowl and cartridge to be installed or removed as a single unit. Contamination and chemical contact are minimized.



- Ultra Clean ppt Grade
- Easy and Fool-Proof Filter Installation/Changeout
- No-Touch Cartridge Changeout
- Universal Filter Cartridge Compatibility
- Tremendous Tool Space Savings

DIMENSIONS

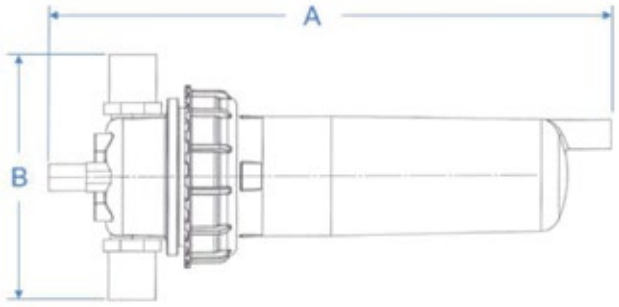

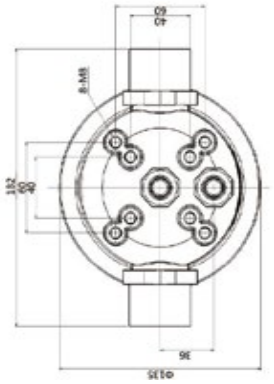

Inlet/Outlet	Vent/Drain	Dimensions				
		A (5")	A (10")	A (20")	A (30")	B
1" Flaretek	1/2" Flaretek	351 mm	481 mm	710 mm	957 mm	202 mm
3/4" Flaretek	1/2" Flaretek	192 mm	481 mm	710 mm	710 mm	192 mm
3/4" Super Pillar	1/2" Super Pillar	180 mm	458 mm	687 mm	934 mm	180 mm
S300	S300	182 mm	459 mm	688 mm	935 mm	182 mm

SPECIFICATIONS

Materials	Housing Head	PFA
	Housing Bowl	PFA
	O-Ring	E-FKM/FFKM
	Mounting Hardware – Nuts and Bolts	PVDF/PFA Coated Stainless Steel
	Lock Ring (Nonwetted part)	PVDF/PP
Connections	Cartridge Connections	2-222 O-Rings
	Inflow/Outlet Connections	See Order Information
Max. Operating Conditions	Max. Operating Pressure	0.75 MPa (108 psi) @ 25 °C (77 °F) 0.3 MPa (43 psi) @ 100 °C (202 °F)
	Max. Operating Temperature	100 °C (212 °F)

ORDERING INFORMATION

YYAL

- **Length**
  - A = 5″
  - 1= 10″
  - 2 = 20″
  - 3 = 30″
- **Inlet/Outlet**
  - FL16 = 1″ Flaretek
  - FL12 = 3/4″ Flaretek
  - PL12 = 3/4″ Super Pillar
  - S300 = S300
- **Vent/Drain**
  - FL08 = 1/2″ Flaretek
  - PL08 = 1/2″ Pillar
  - S300 = S300
- **O-ring**
  - K = FFKM
  - T = E-FKM
- **Locking Ring**
  - V = PVDF
  - P = PP
- **Union Nuts**
  - N = with union nuts